
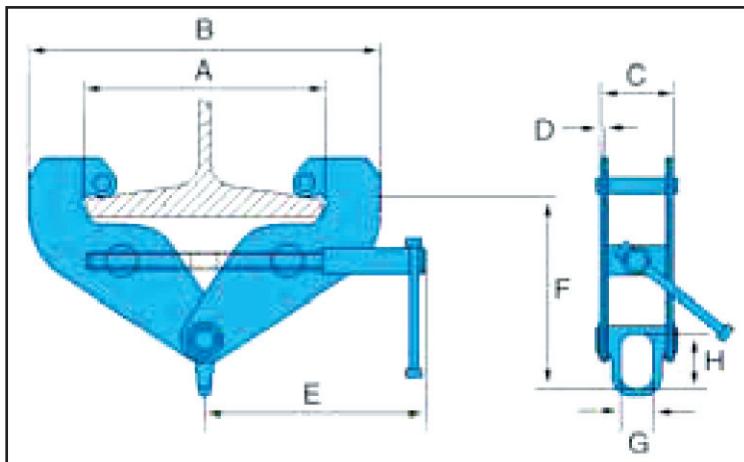


## Beam Clamps | 1 – 10 Ton | corso® | Adjustable Beam Clamps

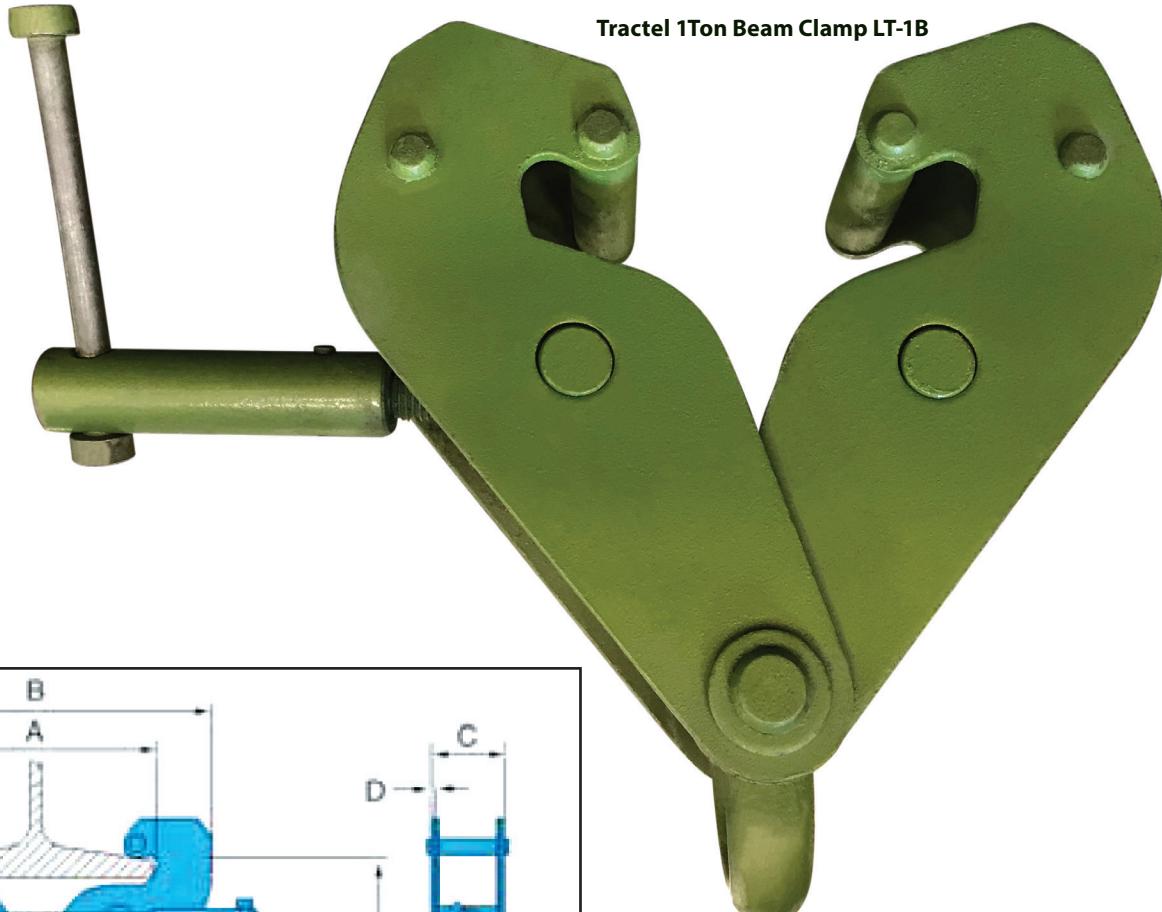

### Dimensions

WLL	Model	A max. (in)	B min. (in)	B max. (in)	C (in)	D (in)	E min. (in)	F min. (in)	F max. (in)	G (in)	H (in)	Beam Width (in)	Weight (lbs.)
1t	<b>LT-1B</b>	10.6	7.1	15	3	0.2	8.3	4.7	6.9	1.2	1.8	3 – 9	10.6
2t	<b>LT-2B</b>	10.6	7.2	15	3.3	0.2	8.3	5.1	7.1	1.2	1.6	3 – 9	12.3
3t	<b>LT-3B</b>	13.2	9.3	19.3	4.5	0.3	10.8	6.9	9.8	1.8	2.4	3.1 – 13	24
5t	<b>LT-5B</b>	13.9	10	19.3	5.4	0.4	9.6	5.5	8.7	1.8	2.4	3.1 – 13	27.1
10t	<b>LT-10B</b>	12.6	10	22.8	6.3	0.5	10.8	9.8	11.8	2.4	3.5	3.1 – 12.6	46.3

Green shading reflects rental inventory.

All specifications and data relating to capacity, function, performance, size, purpose, or design have been provided by the manufacturer. They have not been independently verified by LGH and LGH makes no representation or warranty as to their accuracy or completeness.



spec sheet 054

October 03, 2023 04:26 PM