
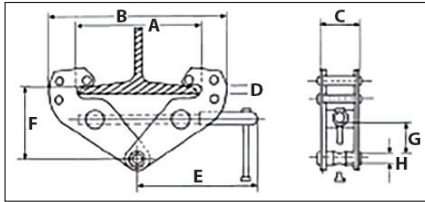




Beam Clamps | 2 – 12 Ton | Oz BC | Adjustable Beam Clamps

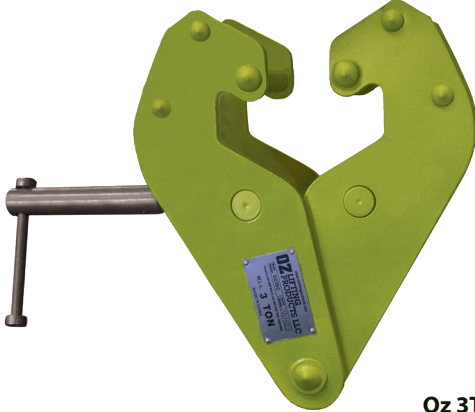

Oz 3T Beam Clamp OZ3BC

Beam Clamp Specifications

Model	Capacity (lbs.)	Dimensions								Weight (lbs.)
		A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	
OZ2BC	4,000	2.95–9.05	14.96 max.	2.99	.90	9.13	3.54–5.90	.98	.83	11
OZ3BC	6,000	3.15–12.60	18.50 max.	3.94	1.57	8.54	5.71–8.66	1.89	1.06	21
OZ5BC	10,000	3.54–12.60	19.68 max.	4.41	1.57	8.54	5.71–8.66	1.77	1.30	27
OZ10BC	20,000	3.54–12.60	20.47 max.	4.72	1.60	10.90	6.30–9.05	2.05	2.05	35

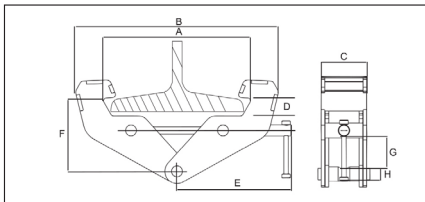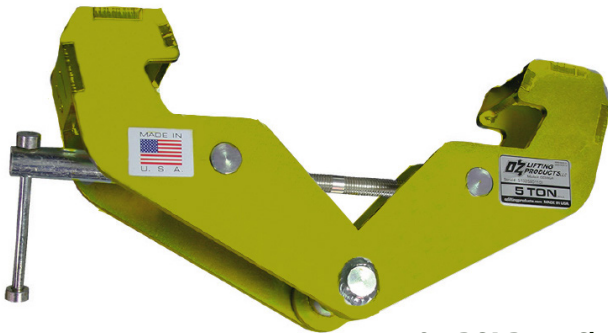

Oz5BCA Beam Clamp

Beam Clamp Specifications

Model	Capacity (tons)	Dimensions								Weight (lbs.)
		A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	
OZ1BCA	1	3–9	14.75	2.51	.90	9.5	4.75–5.75	1.75	.75	9
OZ2BCA	2	3–9	14.75	2.91	.90	9.5	4.75–5.75	1.75	.875	11
OZ3BCA	3	3.5–13	20.5	3.94	1.5	11	7.5–9	2.5	.975	22
OZ5BCA	5	3.5–13	20.5	4.41	1.5	11	7.5–9	2.5	1.125	26
OZ10BCA	10	3.5–13	22	4.72	1.5	11.5	5.5–9.375	4	1.625	39
OZ12BCA	12	3.5–13	22	4.72	1.5	11.5	8.5–105	3.7	1.5	43