


Beam Clamps | 6,720 – 22,400 Lbs. | USC Model | Universal Beam Clamps

Riley Universal Superclamp USC5D

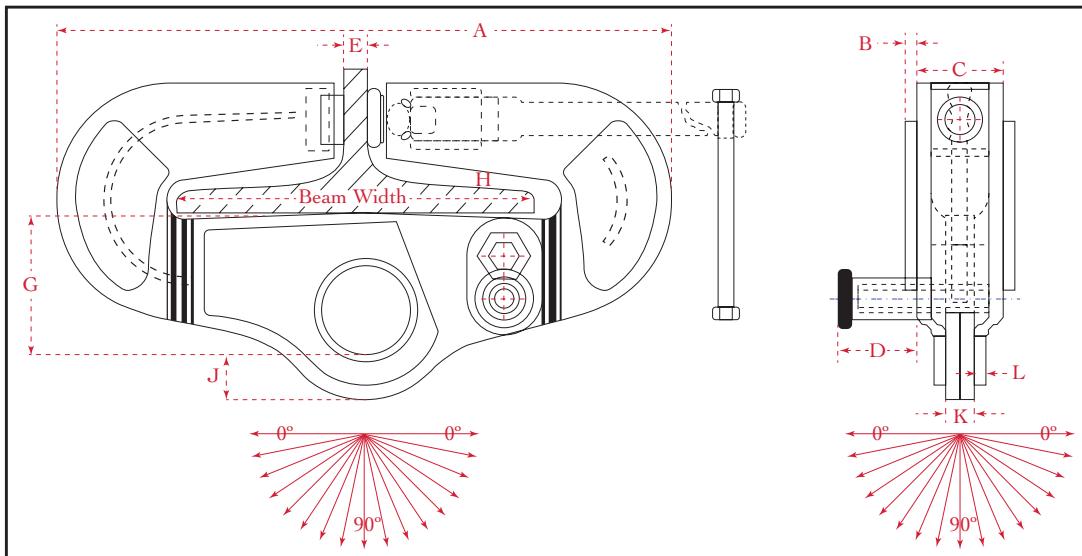

UNIVERSAL 'SUPERCLAMP' DIMENSIONS

For Side Load Applications Where Conventional 'SUPERCLAMPS' Are Unsuitable

Model	WLL		Beam Width Min-Max (in)	Dimensions										Weight (lbs.)
	lbs.	kg		A (in)	B (in)	C (in)	D (in)	E (in)	G (in)	H (in)	J (in)	K (in)	L (in)	
USC3A	6,720	3,048	5 – 8	15.2	N/A	2.8	1.9	1.3	4	1	1.1	.8	N/A	30
USC4	8,960	4,064	5 – 12	20.4	.4	2.8	1.9	1.3	4	1	1.1	.4	.4	51
USC5	11,200	5,080	5 – 12	20.6	.4	3	1.9	1.3	4.7	1	1.1	1	.4	62
USC5D	22,400	10,160	5 – 12	20.6	.4	3	4	1.3	4.7	1	1.1	1	.5	83.8
USC5D400	22,400	10,160	9 – 16	24.6"	.4"	3"	4"	1.3"	4.7"	1"	1.1"	1"	.5"	99.2

Green shading reflects rental inventory.

Riley (Lifting Equipment) Ltd

All specifications and data relating to capacity, function, performance, size, purpose, or design have been provided by the manufacturer. They have not been independently verified by LGH and LGH makes no representation or warranty as to their accuracy or completeness.

spec sheet 056

October 03, 2023 04:21 PM