





THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Air Winches | 1,000 – 22,000 Lbs. | Classic Series

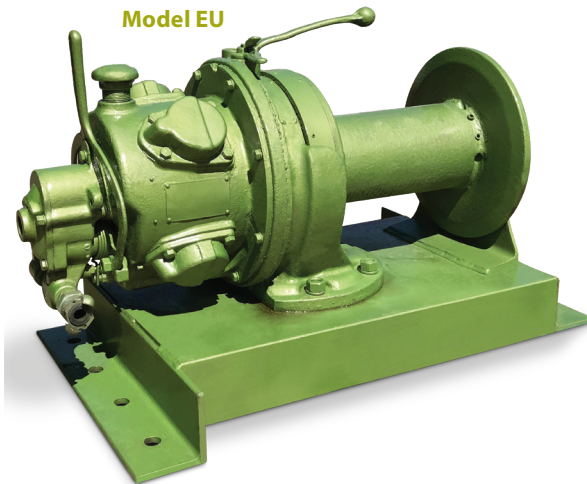

Model EU

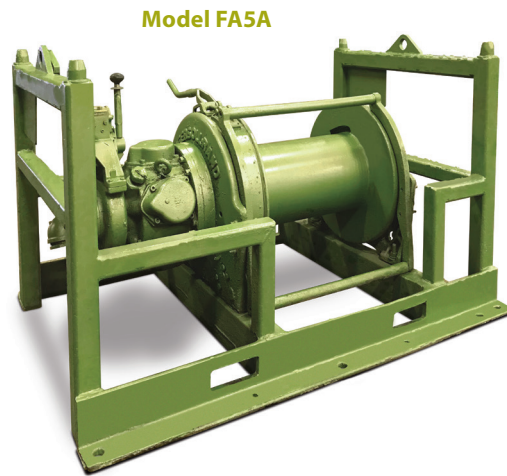

Model FA5A

Lifting: ANSI/ASME B30.16 Allowable Rated Line Pulls (5:1 Design Factor)

Model	First Layer				Mid Layer				Top Layer				Average Flow Required	
	Capacity		Speed		Capacity		Speed		Capacity		Speed			
	lbs.	kg	fpm	m/min.	lbs.	kg	fpm	m/min.	lbs.	kg	fpm	m/min.	cfm	m3/min.
BU7A	1,200	545	36	11	1,000	454	43	13	1,000	454	39	12	50	1.4
EU	2,100	955	62	19	2,000	909	68	21	2,000	909	64	20	100	2.8
EUL	2,100	955	62	19	2,000	909	68	21	2,000	909	64	20	100	2.8
FA2B	5,000	2,273	79	24	4,000	1,818	96	29	3,200	1,455	122	37	350	9.9
FA5A	11,400	5,182	40	12	10,000	4,545	50	15	8,000	3,636	62	19	700	19.8
FA10	27,200	12,364	28	9	27,100	12,319	19	6	22,000	10,000	23	7	800	22.7

Green shading reflects rental inventory.

Pulling: ANSI/ASME B30.7 Allowable Rated Line Pulls (3.5:1 Design Factor)

Model	First Layer				Mid Layer				Top Layer				Average Flow Required	
	Capacity		Speed		Capacity		Speed		Capacity		Speed			
	lbs.	kg	fpm	m/min.	lbs.	kg	fpm	m/min.	lbs.	kg	fpm	m/min.	cfm	m3/min.
BU7A	1,500	682	26	8	1,200	545	34	10	1,000	454	39	12	50	1.4
EU	3,000	1,364	45	14	2,600	1,182	49	15	2,000	909	64	20	100	2.8
EUL	3,000	1,364	45	14	2,600	1,182	49	15	2,000	909	64	20	100	2.8
FA2B	5,100	2,318	76	23	4,000	1,818	96	29	3,200	1,455	122	37	350	9.9
FA5A	13,100	5,955	26/8	8	10,000	4,545	50	15	8,000	3,636	62	19	700	19.8
FA10	34,000	15,455	17	5	27,100	12,319	19	6	22,000	10,000	23	7	800	22.7

Green shading reflects rental inventory.

(1) Standard cable is overwound; LS1500R and PS2400R are underwound.

It is the user's responsibility to determine the suitability of these winches for any particular use and to check for compliance with applicable regulations.

