




THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Double Drum Air Winch | 10,000 Lbs. | K6UL - 24" Drum


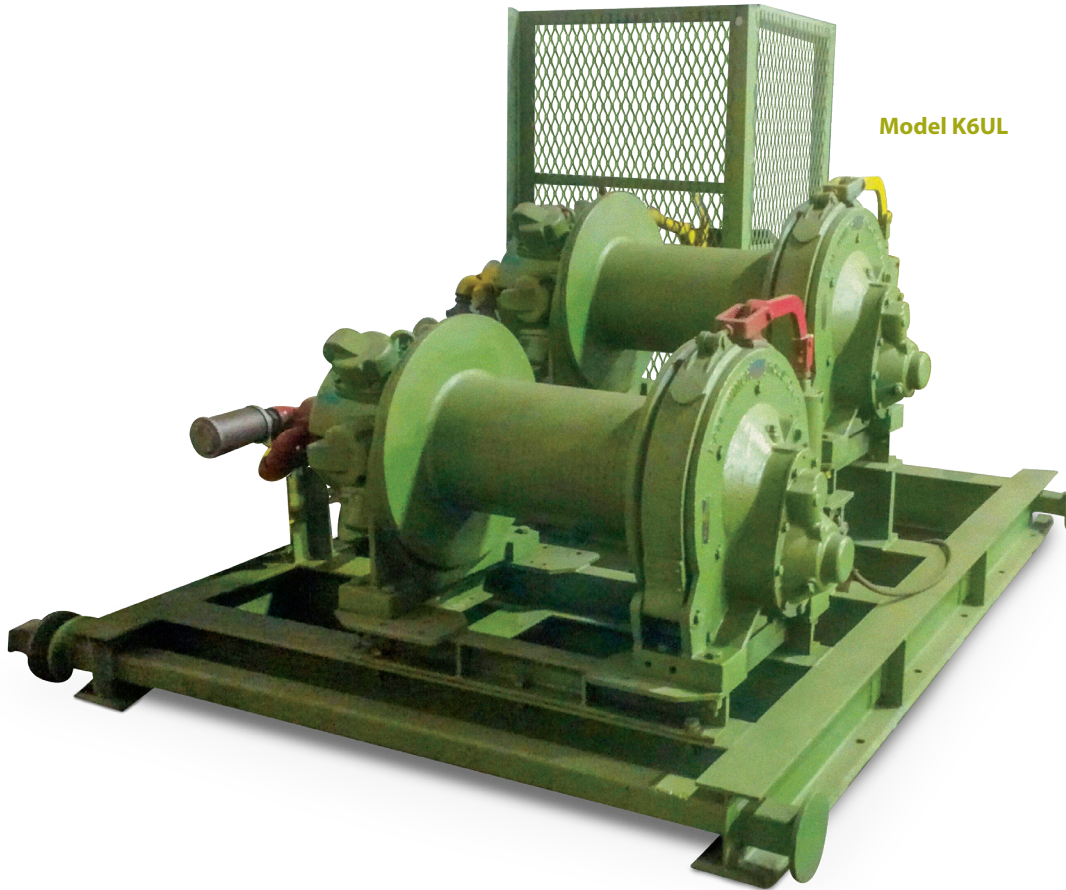


Model K6UL

Dimensions

Model	K6UL
A	58 1/2"
B	24"
C	38 7/8"
D	16 3/4"
E	15 1/4"
Total Weight (lbs)	4,400"

Specification Drawings to match the information in this table can be found on pages 92 and 94 of this catalog.
Green shading reflects rental inventory.

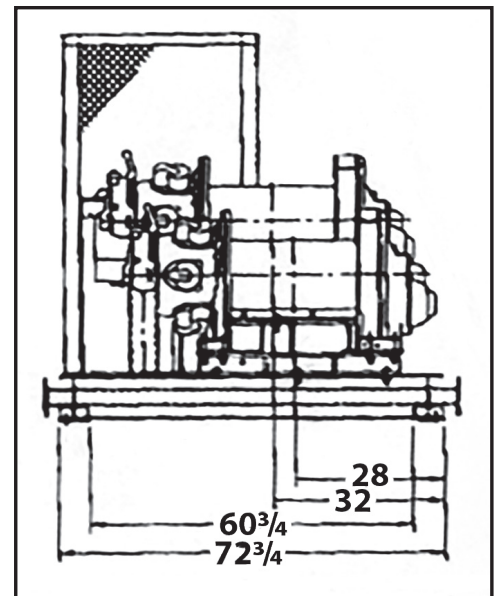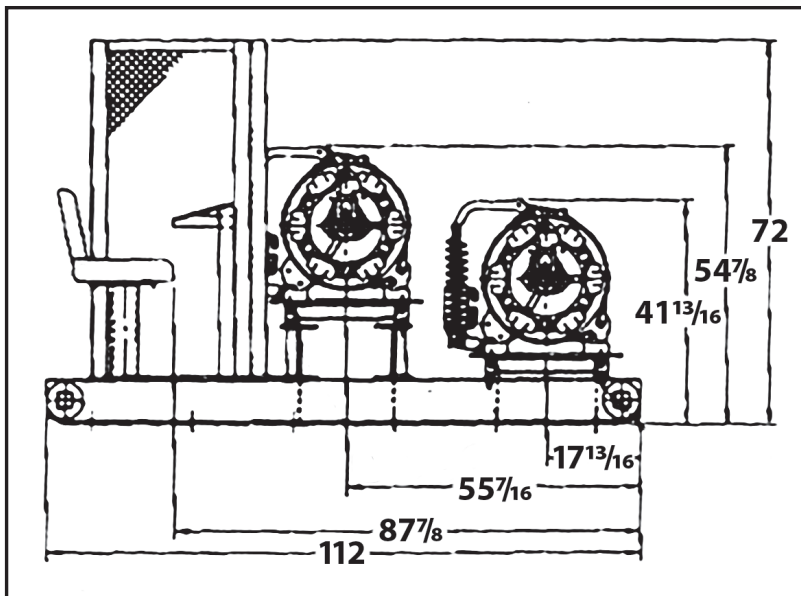




THE LIFTING EXPERTS

(800) 878-7305

www.RentLGH.com

Rentals@RentLGH.com

Air Winches | 5,000 – 10,000 Lbs. | Classic K Series

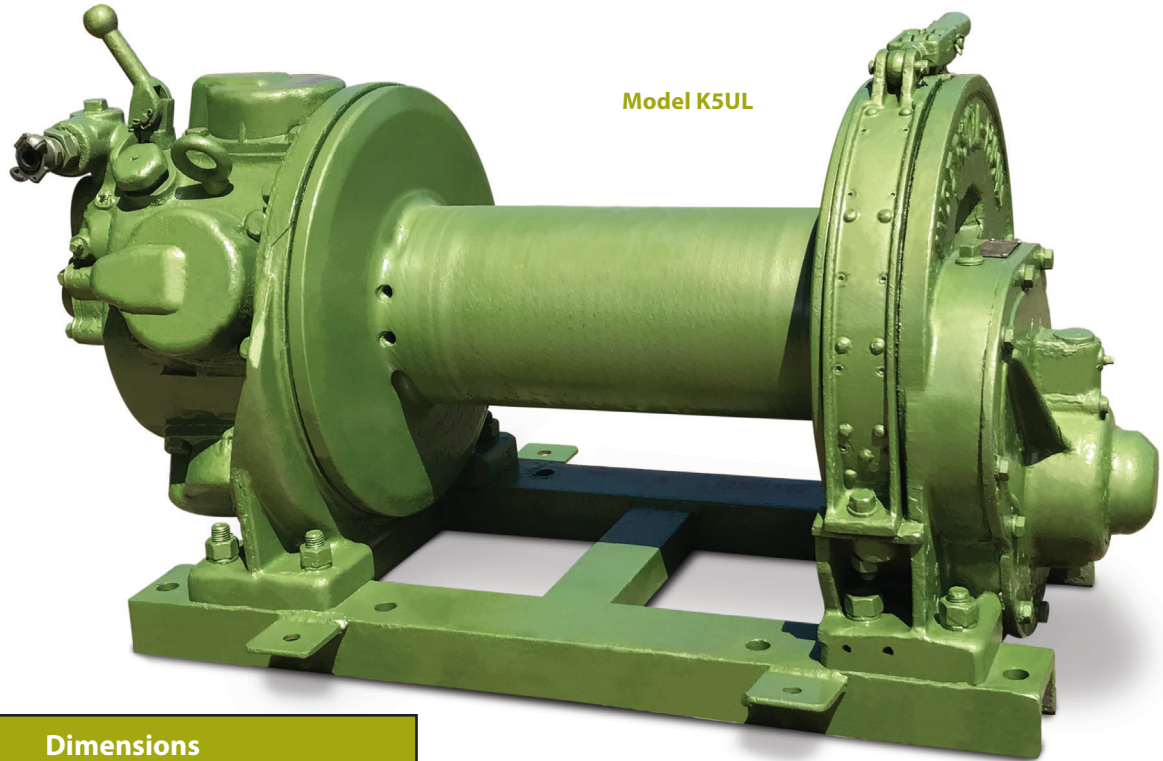


Model K5UL

Dimensions


Model	A in.	B in.	C in.	D in.	E in.
K5U	See Dimension Below				
K5UL	See Dimension Below				
K6U	46 1/2	12	26 7/8	10 3/4	9 1/4
K6UL	58 1/2	24	38 7/8	16 1/4	15 1/4

Note: Dimensions are subject to change. Please contact factory for certified prints.
Green shading reflects rental inventory.

Series K5U – K5UL

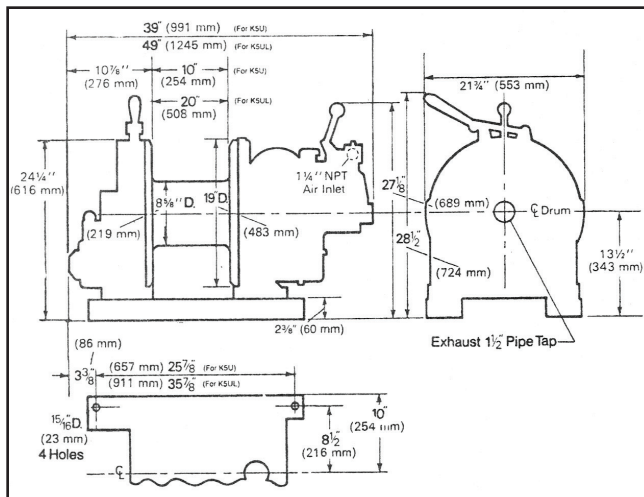

Series K6U – K6UL

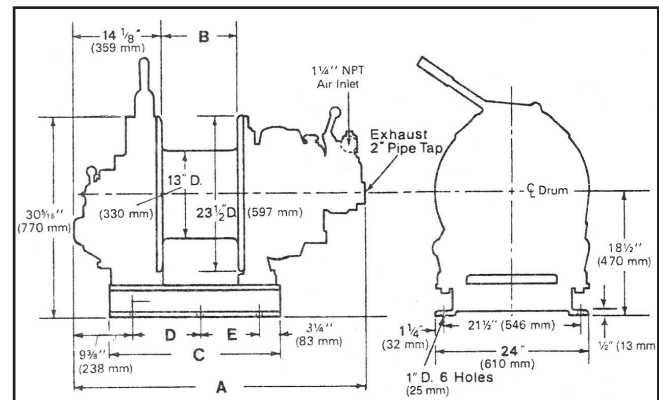




THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Air Winches | 1,000 – 10,000 Lbs. | Classic Series

Model HU

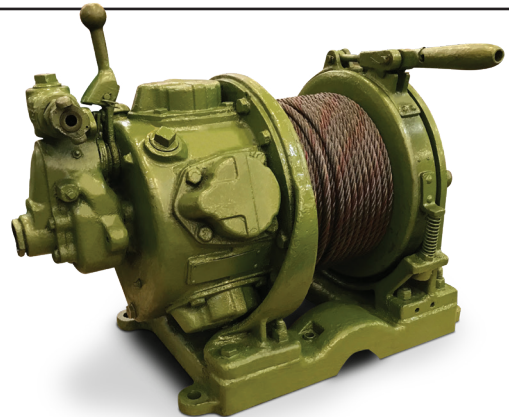

Classic Air Winch Specifications

Model	Line Pull (lbs.)	Line Speed fpm	Drum Length (in.)	Motor HP	SCFM	Max. Stall First Layer @ 90 PSI (lbs.)	Pipe Inlet Size (in.)	Hose Size (in.)	Net Weight (lbs.)
BU7A	1,000	45	4.6	1.6	50	1,950	1/2	3/4	75
HU	2,500	110	7 1/8	11	175	5,000	1	3/4	562
HUL	2,500	110	15 13/16	11	175	5,000	1	3/4	562
H5U	3,000	150	7 1/8	14	290	7,800	1 1/4	1 1/2	525
H5UL	3,000	150	15 13/16	14	290	7,800	1 1/4	1 1/2	598
HU40	4,000	70	7 1/8	11	175	9,000	1	1 1/4	525
HUL40	4,000	70	15 13/16	11	175	9,000	1	1 1/4	600
K5U	5,000	115	10	19	420	10,500	1 1/4	1 1/2	890
K5UL	5,000	115	20	19	420	10,500	1 1/4	1 1/2	890
K6U	10,000	55	12	24	600	15,000	1 1/4	1 1/2	1,314
K6UL	10,000	55	24	24	600	15,000	1 1/4	1 1/2	1,550

Performance is based on 90 psi air inlet pressure.
Green shading reflects rental inventory.

Classic Series Drum Wire Rope Storage Capacities

Model	Capacity (lbs.)	Max. Length on Winch (tightly wound)*								Rope Anchor Hole Diameter (in.)
		1/4" ft.	5/16" ft.	3/8" ft.	7/16" ft.	1/2" ft.	5/8" ft.	3/4" ft.	7/8" ft.	
BU7A	1,000	245	140	—	—	—	—	—	—	3/8
HU	2,500	—	—	686	476	379	—	—	—	11/16
HUL	2,500	—	—	1,445	1,012	813	—	—	—	—
H5U	3,000	—	—	686	476	379	—	—	—	—
H5UL	3,000	—	—	1,445	1,012	813	—	—	—	—
HU40	4,000	—	—	686	476	379	—	—	—	11/16
HUL40	4,000	—	—	1,445	1,012	813	—	—	—	11/16
K5U	5,000	—	—	—	851	713	457	—	—	11/16
K5UL	5,000	—	—	—	1,741	1,427	913	—	—	—
K6U	10,000	—	—	—	—	—	716	535	373	1
K6UL	10,000	—	—	—	—	—	1,436	1,070	775	—

*Recommended drum working storage capacity is 80% of values shown.
Green shading reflects rental inventory.