




THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Sheave Blocks | 25 Ton | 435 | Alloy - Single Sheave (Shackle Top)

435 with Shackle

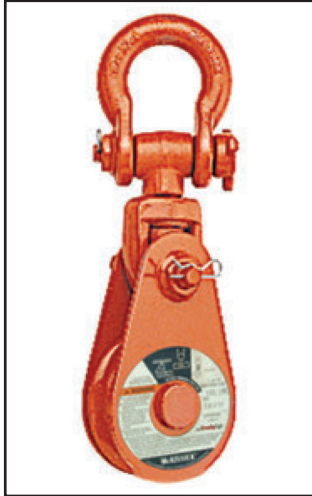

All alloy high capacity snatch blocks

- Entire block made from heat treated alloy steel. Use of heat treated alloy results in a 40% reduction in weight from blocks of comparable capacities.
- Available with bronze bushed sheaves.
- Easy opening feature of "Champion" blocks retained.
- Pressure lube fittings.
- Can be furnished with hook latch.
- Fatigue Rated.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life material traceability, not addressed by ASME B30.26.
- All sizes are RFID EQUIPPED.

Specifications

435 with Shackle

Sheave Diameter (in)	Bearing Code	Model	Wire Rope Size (in) [†]	WLL	Weight (lbs)
8	BB	168295	1	25	102
8	BB	302568	1 1/8	25	102
10	BB	208956	1	25	118
10	BB	208965	1 1/4	25	118
10	BB	302577	1 1/8	25	118

Green shading reflects rental inventory.

[†]May be furnished in other Wireline sizes.