




22 – 150 ton | HL & HCLW Series | Single Sheave (Shackle Top)

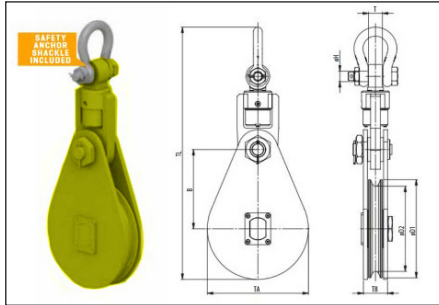

Specifications											
Model Number	WLL	For wire ød	Dimensions (in)								Weight (lbs)
	US Tons	in	øD1	øD2	B	øH	T	TA	TB	TC (TL)	
VB 240.28.1.20.S	22	1 – 1 1/8	11.8	9.4	10.0	1.5	1.9	12.2	3.3	28.9	120
VB 300.32.1.25.S	27.5	1 1/8 – 1 1/4	14.4	11.8	11.3	1.6	2.1	14.8	3.3	31.2	140
VB 390.32.1.32.S	35	1 1/8 – 1 1/4	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 390.38.1.32.S	35	1 3/8 – 1 1/2	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 430.32.1.32.S	35	1 1/8 – 1 1/4	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB.430.38.1.32.S	35	1 3/8 – 1 1/2	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB 430.32.1.36.5.S	40	1 1/8 – 1 1/2	19.5	16.9	15.7	2.1	2.8	20.1	4.8	42.7	440
VB 520.52.1.55.S	60	1 3/4 – 2	23.4	20.5	18.1	2.3	3.1	24.0	5.6	50.4	680
VB 520.52.1.75.S	82.5	1 3/4 – 2 1/4	23.4	20.5	18.1	2.9	3.9	24.0	5.6	52.6	726
VB670.68.1.120.S	132	2 1/2 – 2 3/4	30	26.4	26.2	3.9	5.6	30.7	7.9	86.5	1786

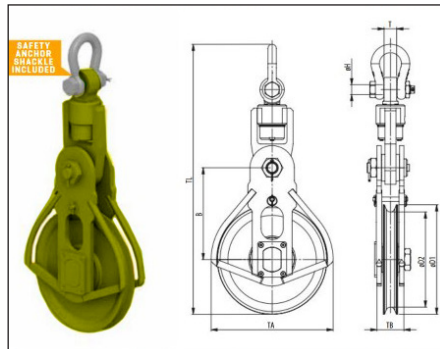

Specifications											
Model Number	WLL	For wire ød	Dimensions (in)								Weight (lbs)
	US Tons	in	øD1	øD2	B	øH	T	TA	TB	TL	
HCLW 760.76.1.137,5.S	150	2 3/4 – 3	35.4	29.9	28.9	3.3	4.7	38.6	7.9	74.4	1540

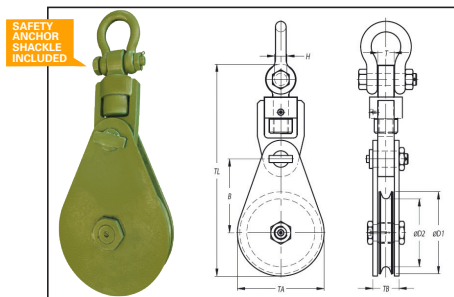

Specifications											
Model Number	WLL	For wire ød	Dimensions (in)								Weight (lbs)
	US Tons	in	øD1	øD2	B	øH	T	TA	TB	TL	
VB 240.28.1.20.S	22	1-1 3/4	11.8	9.4	10	1.5	1.9	12.2	3.3	28.9	120
VB 300.32.1.32.S	27.5	1 1/8-1 1/4	14.4	11.8	11	1.6	2.1	14.8	3.3	31.2	140
VB 390.32.1.32.S	35	1 1/8-1 1/4	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 390.38.1.32.S	35	1 3/8-1 1/2	17.7	15.4	13.8	2.1	2.8	18.5	4.4	39.5	310
VB 430.32.1.32.S	35	1 1/8-1 1/4	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB 430.38.1.32.S	35	1 3/8-1 1/2	19.5	16.9	14.8	2.1	2.8	20.1	4.4	41.3	330
VB 430.32.1.36.5.S	40	1 1/8-1 1/4	19.5	16.9	15.7	2.1	2.8	20.1	4.8	42.7	440
VB 520.52.1.55.S	60	1 3/4-2	23.4	20.5	18.1	2.3	3.1	24	5.6	50.4	680
VB 520.522.1.75.S	82.5	1 3/4-2 1/4	23.4	20.5	18.1	2.9	3.9	24	5.6	52.6	726