




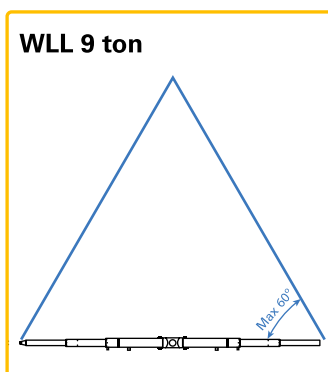

THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Telescopic Spreader Beams | 9 Ton | Spreader Lifting Beam

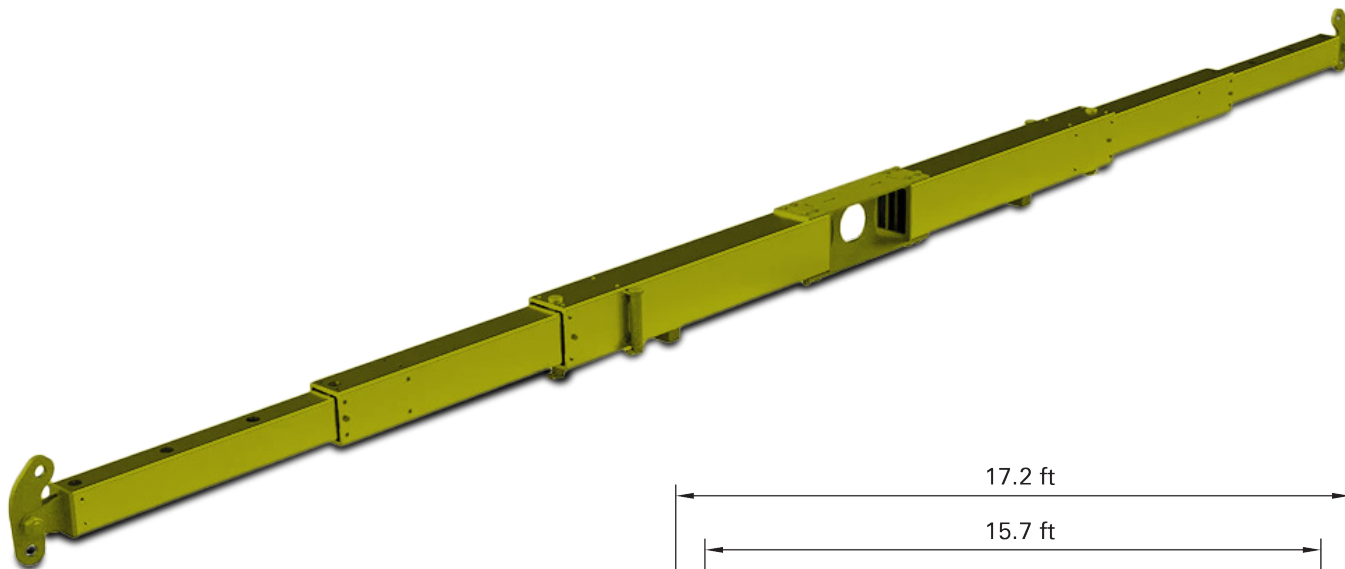


Max Load: 9 ton
Material: Aluminium/Steel
Net Weight: 159 lbs

For larger lifting angles the maximum load needs to be limited as follows:

45° = 5 ton max.

60° = 9 ton max.

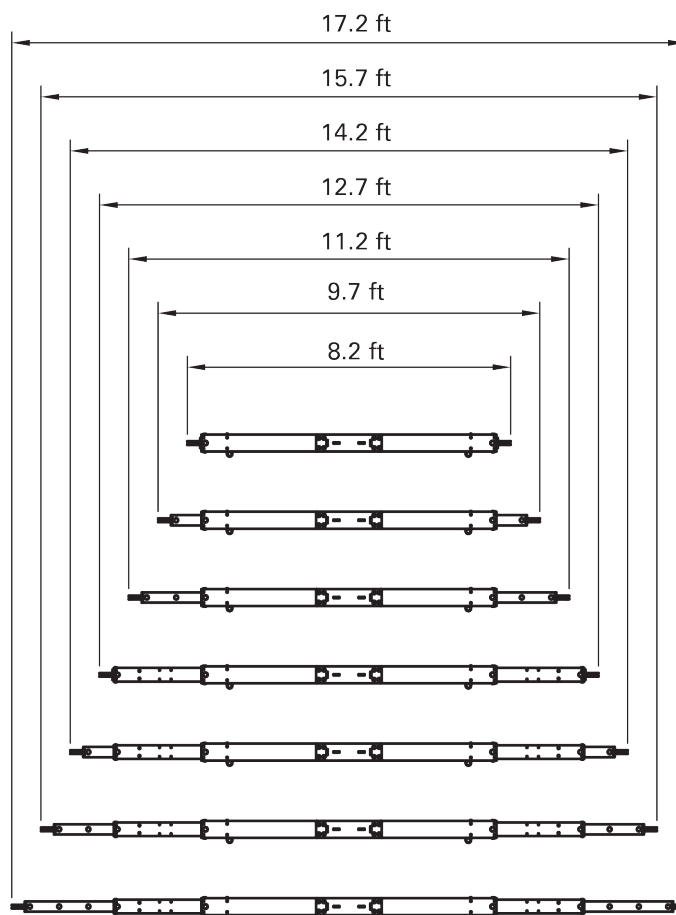

**Two Leg Plasma Bridal Assembly 3/4 in x 17ft
(23,800 lbs capacity) Included With Beam.
See Top of page 247 For Specifications**




THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Plasma Rope Lifting Slings|22,800 - 76,300 lbs. | (Rated @ 60 Deg.) |Eye-to-Eye

Design Factor is 5; WLL (Work Load Limit) of each multi-leg Plasma® sling is 5:1


Plasma® Multi-leg slings are available proof-loaded and tag-certified to 2 times WLL

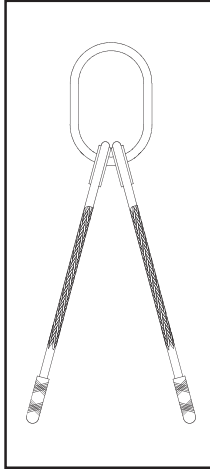

Specifications

Rope dia. Used		Number of Legs	Minimum Sling Length		Assembly Capacity Rating @ 5:1 WLL						Alooy Oblong Master Link
					60°		45°		30°		
(in)	(mm)		ft/in	m	Pounds	Tonnes	Pounds	Tonnes	Pounds	Tonnes	
3/4	18	2	6'7"	2.0	23,800	10.8	19,400	8.8	13,700	6.2	1

Green shading reflects rental inventory.

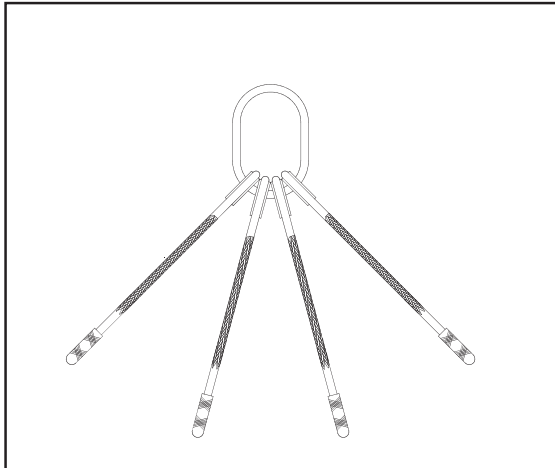

Specifications

Rope dia. Used		Number of Legs	Minimum Sling Length		Assembly Capacity Rating @ 5:1 WLL						Alooy Oblong Master Link
					60°		45°		30°		
(in)	(mm)		ft/in	m	Pounds	Tonnes	Pounds	Tonnes	Pounds	Tonnes	
1	24	4	8'10"	2.7	76,300	34.6	62,200	28.2	44,100	20.0	1 3/4

Green shading reflects rental inventory.