








THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Telescopic Spreader Beams | 30 Ton | 4-Way Spreader Lifting Beam



Max Load: 30 ton
Material: Steel
Net Weight: 1,245 Lbs

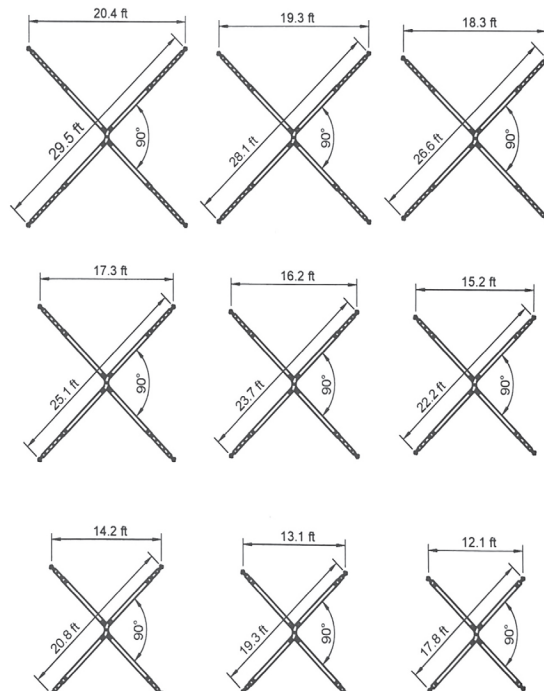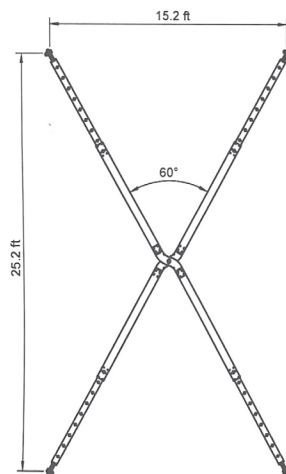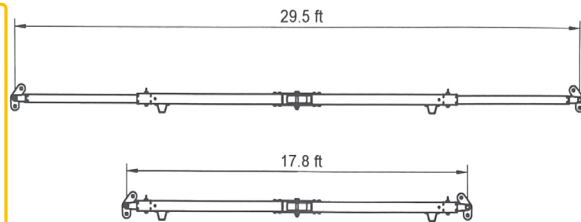

Four Leg Plasma Bridal Assembly 1 in x 20ft (76,300 lbs capacity) Included With Beam.
See Bottom of page 247 For Specifications




THE LIFTING EXPERTS

(800) 878-7305 www.RentLGH.com Rentals@RentLGH.com

Plasma Rope Lifting Slings|22,800 - 76,300 lbs. | (Rated @ 60 Deg.) |Eye-to-Eye


Design Factor is 5; WLL (Work Load Limit) of each multi-leg Plasma® sling is 5:1

Plasma® Multi-leg slings are available proof-loaded and tag-certified to 2 times WLL

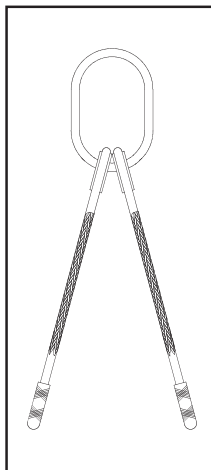

Specifications											
Rope dia. Used		Number of Legs	Minimum Sling Length		Assembly Capacity Rating @ 5:1 WLL						Alooy Oblong Master Link
					60°		45°		30°		
(in)	(mm)		ft/in	m	Pounds	Tonnes	Pounds	Tonnes	Pounds	Tonnes	
3/4	18	2	6'7"	2.0	23,800	10.8	19,400	8.8	13,700	6.2	1

Green shading reflects rental inventory.

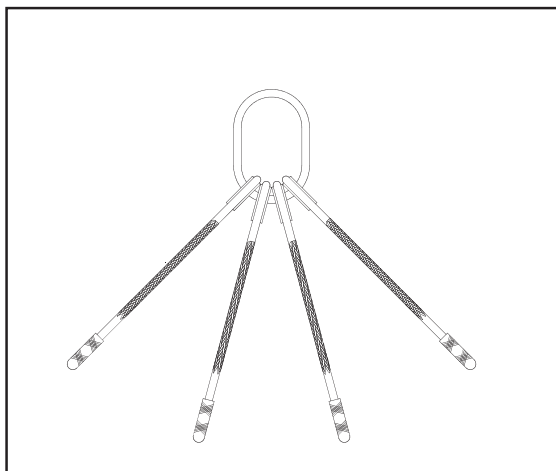

Specifications											
Rope dia. Used		Number of Legs	Minimum Sling Length		Assembly Capacity Rating @ 5:1 WLL						Alooy Oblong Master Link
					60°		45°		30°		
(in)	(mm)		ft/in	m	Pounds	Tonnes	Pounds	Tonnes	Pounds	Tonnes	
1	24	4	8'10"	2.7	76,300	34.6	62,200	28.2	44,100	20.0	1 3/4

Green shading reflects rental inventory.